

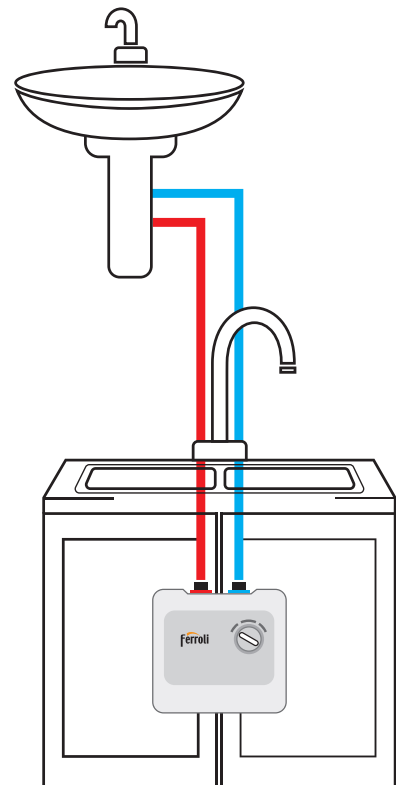


> MINI INSTANT FITS EVERYWHERE



- > External casing in strong ABS
- > Reinforced hanging bracket with internal steel bar
- > Capillary thermostat
- > High concentration magnesium anode
- > ON/OFF switch
- > Front step-less temperature adjustment, with power level led indication
- > Under-sink only



MINI			5.5
Dimensions		mm	210 x 197 x 117
ErP Class		(G - A Class)	B
Water Connections		inches	1/2" M
Water Flow Rate	Min	l/min	2
Heating Operating Pressure	Min / Max	bar	0.8 / 6
Power		kW	5.5
Voltage			220~240V 50-60 HZ
Weight		Kg	1.5
CODE			FUS-5.5S

FEATURES



OPERATING LIGHT



TEMPERATURE
ADJUSTMENT



INGRESS
PROTECTION IPX4



RUST FREE



ON/OFF SWITCH